

THREE PHASE CONTACTOR DOL STARTER CONTROL PANEL

MICROCONTROLLER BASED
STATE OF THE ART FULLY
FEATURED DESIGN



FEATURES


- Sturdy powder-coated metal cabinet
- Digital display with user friendly keys
- True RMS voltage and current measurement
- LED indication of each fault
- Auto pump protection setting
- Inbuilt water level Controller (Optional)
- RTC based week timer control panel available (Optional)
- Operating voltage range 250Vac-480Vac at 50Hz
- Current range 0.5A-25A
- Contactor – Schneider/Siemens /Eton/C&S make – 25Amp
- MCB - Schneider/Siemens /Eton/C&S make – 25Amp

PREVENTION AGAINST

- | | |
|---|---|
| Dry Run | Overload |
| High Voltage | Low Voltage |
| Extreme high current | Phase Failure from input side (input SPP) |
| Phase Failure from output side (output SPP) | Voltage unbalance up to 80V |
| Current unbalance | |

ADJUSTABLE

- | | |
|------------------------------|-----------------------------|
| Overload current & trip time | Dry Run current & trip time |
| Dry Run Auto Start Timer | Pump ON timer |

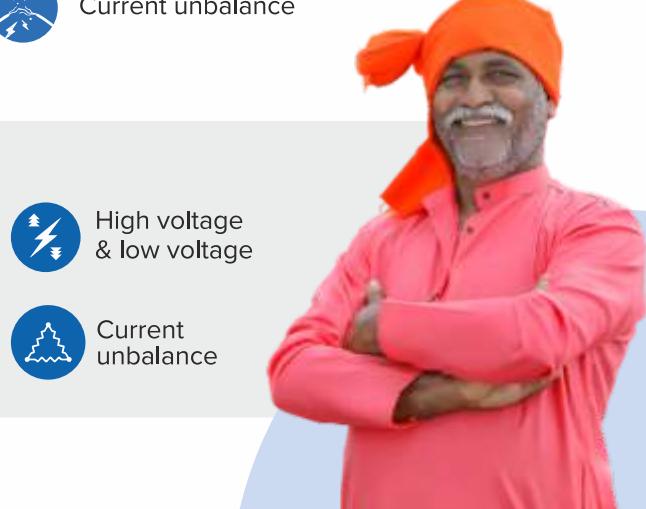

Cyclic Timer Mode (Optional)

ON time

OFF time

Mfg By :



Customer Care

+91 7888077933

+91 7888077944